



TEST REPORT

Reference No. : WTU21N09102514E
Applicant : LUMATEK LTD.
Address : Ewropa Business centre Level 3 – 701 Dun Karm Street
Birkirkara BKR 9034 MALTA
Manufacturer : LUMATEK LTD.
Address : Ewropa Business centre Level 3 – 701 Dun Karm Street
Birkirkara BKR 9034 MALTA
Product Name : LED Luminaires
Model No. : ZEUS 1000W PRO
Standards : EN IEC 55015:2019+A11:2020
EN 61547:2009
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1:2019
Date of Receipt sample : 2021-07-26
Date of Test : 2021-07-29 to 2021-08-03
Date of Issue : 2021-10-18
Test Report Form No. : WEL-55015A-03B
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Ningbo) Co., Ltd.

Address: Zone 3, 1/F., No.6, Building 011, No.1177, Lingyun Road, Ningbo
Hi-Tech Zone, Yinzhou District, Ningbo, Zhejiang, China

Tel: +86-574-8749 3888

Fax: +86-574-8386 8018

Compiled by:

Shouyin Wang / Project Engineer

Approved by:

Jianzhong Mao / Manager



1 Test Summary

EMISSION			
Test Item	Test Standard	Class / Severity	Result
Mains Terminal Disturbance Voltage, 9kHz to 30MHz	EN IEC 55015:2019+A11:2020	Clause 4.3.1	Pass
Radiated electromagnetic disturbance, 9kHz to 30MHz	EN IEC 55015:2019+A11:2020	Clause 4.5.2	Pass
Radiated Emission, 30MHz to 1GHz	EN IEC 55015:2019+A11:2020	Clause 4.5.3	Pass
Harmonic Current emission	EN IEC 61000-3-2:2019	Clause 7	Pass
Voltage Changes, Voltage Fluctuation and Flicker	EN 61000-3-3:2013+A1:2019	Clause 5	Pass
IMMUNITY (EN 61547:2009)			
Test Item	Test Method	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	B	Pass
Radio-frequency electromagnetic fields (80MHz to 1GHz)	IEC 61000-4-3:2006+A1:2007	A	Pass
Electrical Fast Transients (EFT)	IEC 61000-4-4:2004	B	Pass
Surge	IEC 61000-4-5:2005	C	Pass
Injected Currents, 0.15MHz to 80MHz	IEC 61000-4-6:2008	A	Pass
Power-frequency magnetic field	IEC 61000-4-8:1993+A1:2000	A	N/A
Voltage Dips	IEC 61000-4-11:2004	C	Pass
Voltage short interruptions		B	Pass

Remark:

Pass

Test item meets the requirement

Fail

Test item does not meet the requirement

N/A

Test case does not apply to the test object



2 Contents

	Page
COVER PAGE	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF E.U.T.	5
3.2 DETAILS OF E.U.T.	5
3.3 DESCRIPTION OF SUPPORT UNITS.	5
3.4 STANDARDS APPLICABLE FOR TESTING	5
3.5 SUBCONTRACTED.	6
3.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4 EQUIPMENT USED DURING TEST	7
4.1 MEASUREMENT UNCERTAINTY	8
5 EMISSION TEST RESULTS	9
5.1 MAINS TERMINALS DISTURBANCE VOLTAGE, 9KHZ TO 30MHZ	9
5.1.1 E.U.T. Operation	9
5.1.2 Block Diagram of Test Setup	9
5.1.3 Measurement Data	9
5.1.4 Mains Terminals Disturbance Voltage Test Data	10
5.2 RADIATED ELECTROMAGNETIC DISTURBANCE, 9KHZ TO 30MHZ	12
5.2.1 E.U.T. Operation	12
5.2.2 Block Diagram of Test Setup	12
5.2.3 Measurement Data	12
5.2.4 Radiated Electromagnetic Disturbance test data, 9kHz to 30MHz	13
5.3 RADIATED EMISSION, 30MHZ TO 1GHZ	15
5.3.1 E.U.T. Operation	15
5.3.2 Block Diagram of Setup	15
5.3.3 Measurement Data	16
5.3.4 Radiated Emission test data, 30MHz to 1GHz	17
5.4 HARMONICS CURRENT EMISSION	19
5.4.1 E.U.T. Operation	19
5.4.2 Block Diagram of Setup	19
5.4.3 Harmonic Current Emission Test Data	20
5.5 VOLTAGE CHANGES, VOLTAGE FLUCTUATION AND FLICKER	21
5.5.1 E.U.T. Operation	21
5.5.2 Block Diagram of Setup	21
5.5.3 Voltage Changes, Voltage Fluctuation and Flicker Test Data	21
6 IMMUNITY TEST RESULTS	22
6.1 PERFORMANCE CRITERIA	22
6.2 ELECTROSTATIC DISCHARGE (ESD)	22
6.2.1 E.U.T. Operation	22
6.2.2 Block Diagram of Setup	23
6.2.3 Direct Discharge Test Results	23
6.2.4 Indirect Discharge Test Results	24
6.3 RADIO-FREQUENCY ELECTROMAGNETIC FIELDS, 80MHZ TO 1GHZ	24
6.3.1 E.U.T. Operation	24
6.3.2 Block Diagram of Setup	25
6.3.3 Test Results	25
6.4 ELECTRICAL FAST TRANSIENTS (EFT)	26
6.4.1 E.U.T. Operation	26



6.4.2	Block Diagram of Setup	27
6.4.3	Test Results	27
6.5	SURGE	28
6.5.1	E.U.T. Operation	28
6.5.2	Block Diagram of Setup	28
6.5.3	Test Results	28
6.6	INJECTED CURRENTS IMMUNITY 0.15MHZ TO 80MHZ	29
6.6.1	E.U.T. Operation	29
6.6.2	Block Diagram of Setup	29
6.6.3	Test Results	29
6.7	VOLTAGE DIPS AND INTERRUPTIONS	30
6.7.1	E.U.T. Operation	30
6.7.2	Block Diagram of Setup	30
6.7.3	Test Results	30
7	PHOTOGRAPHS – TEST SETUP	31
7.1	PHOTOGRAPH – MAINS TERMINAL DISTURBANCE VOLTAGE TEST SETUP	31
7.2	PHOTOGRAPH – RADIATED ELECTROMAGNETIC DISTURBANCE TEST SETUP, 9kHz TO 30MHz	31
7.3	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHz TO 1GHz	32
7.4	PHOTOGRAPH – HARMONIC CURRENT AND FLICKER TEST SETUP	32
7.5	PHOTOGRAPH – ESD IMMUNITY TEST SETUP	33
7.6	PHOTOGRAPH – RADIO-FREQUENCY ELECTROMAGNETIC FIELDS IMMUNITY TEST SETUP	33
7.7	PHOTOGRAPH – EFT & VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP	34
7.8	PHOTOGRAPH – SURGE IMMUNITY TEST SETUP	34
7.9	PHOTOGRAPH – INJECTED CURRENTS IMMUNITY TEST SETUP	35
8	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	36
8.1	EUT – FRONT VIEW	36
8.2	EUT – BACK VIEW	36



3 General Information

3.1 General Description of E.U.T.

Product Name	:	LED Luminaires
Model No.	:	ZEUS 1000W PRO
Protection Class	:	Class I
Remark	:	1. The EUT (equipment under test) is an ordinary LED Luminaires for Lighting and similar use. For the further information, refer to the user's manual. 2. For details information, refer to the section 3.2. 3. For the test results, the EUT had been tested with the rated input range. But only the worst case was shown in test report.

3.2 Details of E.U.T.

No.	Model	Rated Input	Rated Power	Note
1.	ZEUS 1000W PRO	220-240V~, 50/60Hz	1000W	/

3.3 Description of Support Units

The EUT has been tested as an independent unit. ZEUS 1000W PRO is the tested sample. All tests were performed in the condition of 230V~, 50Hz input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN IEC 55015:2019+A11:2020	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547:2009	Equipment for general lighting purposes — EMC immunity requirements
EN IEC 61000-3-2:2019	Electromagnetic compatibility (EMC) Part 3-2: Limits — Limits for harmonic current emissions (equipment input current ≤ 16 A per phase).
EN 61000-3-3:2013+A1:2019	Electromagnetic compatibility (EMC) Part 3-3: Limits — Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection



3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☒ Yes ☐ No

If Yes, list the related test items and lab information:

Test items: Radio-frequency electromagnetic fields (80MHz to 1GHz)

Lab information: Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

3.6 Abnormalities from Standard Conditions

None.

WALTEK



4 Equipment Used during Test

Mains Terminal Disturbance Voltage (Conducted Emission)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	EMI Test Receiver	R&S	ESCI	101406	Valid
2	TWO-LINE V-NETWORK	R&S	ENV216	101208	Valid
Radiated electromagnetic disturbance(9kHz to 30MHz)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	EMI Test Receiver	R&S	ESCI	101406	Valid
2	loop antenna	SCHWARZBECK	FMZB1519B	00105	Valid
3m Semi-anechoic Chamber for Radiated Emission					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	EMI Test Receiver	R&S	ESR7	101777	Valid
2	TRILOG Biconic logarithmic periodic broadband antenna	SCHWARZBECK	VULB9163	01025	Valid
3	coupling-Decoupling Network	SCHWARZBECK	CDNE M3	00081	Valid
4	coupling-Decoupling Network	SCHWARZBECK	CDNE M2	00093	Valid
Harmonics and Flicker Measuring System					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	Harmonics /Flicker Analyzer	KIKUSUI	KHA1000	TL002966	Valid
2	line Power Supply	KIKUSUI	PCR4000LE	TL003094	Valid
3	Line Impedance Network	KIKUSUI	LIN40MA-PCR-LE	TM001297	Valid
ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	electrostatic discharge generator	TESEQ	NSG437	699	Valid
Radio-frequency electromagnetic fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid



5	RF signal generator	Agilent	N5181A	MY48080720	Valid
6	Power meter	RS	NRP6A	101133	Valid
7	Power meter	RS	NRP6A	101134	Valid
8	Electric field probe	Narda	EP 601	611WX70311	Valid
EFT & Voltage Dips and Interruptions					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	Multifunction Generator Systems	TESEQ	NSG3040	2094	Valid
2	Single way manual Step regulator	TESEQ	INA 6501	243	Valid
Surge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	Multifunction Generator Systems	TESEQ	NSG3060	1654	Valid
2	coupling-Decoupling Network	TESEQ	CDN3061	1485	Valid
Injected Currents					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1	Test System for Conducted and Radiated Immunity	TESEQ	NSG4070	37519	Valid
2	Coupling and Decoupling Network	TESEQ	CDN M016	37358	Valid
3	Attenuator	TESEQ	ATN6075	36917	Valid

4.1 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Mains Terminal Disturbance Voltage	9kHz~30MHz	±2.66dB	(1)
Radiated electromagnetic disturbance	9kHz~30MHz	±3.00dB	(1)
Radiated Emission	30MHz~1GHz	±5.03dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5 Emission Test Results

5.1 Mains Terminals Disturbance Voltage, 9kHz to 30MHz

Test Requirement.....	: EN IEC 55015
Test Method.....	: CIPR 16-2-1 and Clause 8.3 of EN IEC 55015
Test Result.....	: Pass
Frequency Range.....	: 9kHz to 30MHz
Class/Severity.....	: Table 1 of EN IEC 55015

5.1.1 E.U.T. Operation

Operating Environment:

Temperature : 22.6°C

Humidity..... : 51%RH


EUT Operation:

Input Voltage : 230V~, 50Hz

Operating Mode..... : On mode

5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the EN IEC 55015.

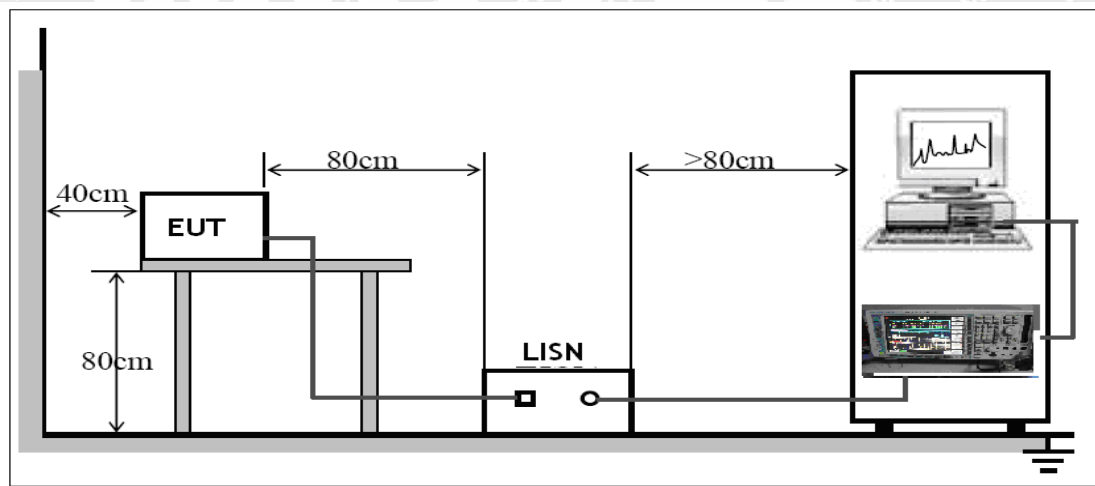


5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



5.1.4 Mains Terminals Disturbance Voltage Test Data


Live Line

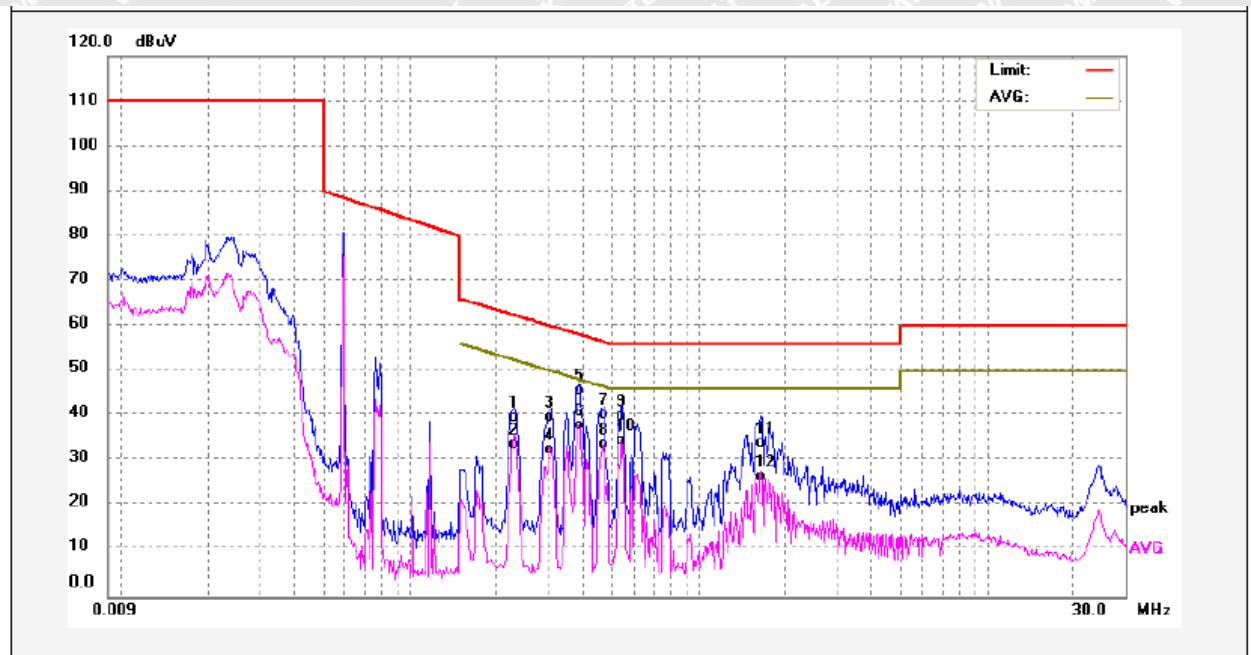

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2301	30.10	9.63	39.73	62.44	-22.71	QP	
2	0.2301	24.11	9.63	33.74	52.44	-18.70	AVG	
3	0.3076	30.25	9.63	39.88	60.03	-20.15	QP	
4	0.3076	22.99	9.63	32.62	50.03	-17.41	AVG	
5	0.3873	36.10	9.62	45.72	58.12	-12.40	QP	
6	0.3873	28.32	9.62	37.94	48.12	-10.18	AVG	
7	0.4701	30.75	9.63	40.38	56.51	-16.13	QP	
8	0.4701	24.16	9.63	33.79	46.51	-12.72	AVG	
9	0.5457	30.48	9.63	40.11	56.00	-15.89	QP	
10	0.5457	25.12	9.63	34.75	46.00	-11.25	AVG	
11	1.6510	24.31	9.69	34.00	56.00	-22.00	QP	
12	1.6510	17.01	9.69	26.70	46.00	-19.30	AVG	



Neutral Line

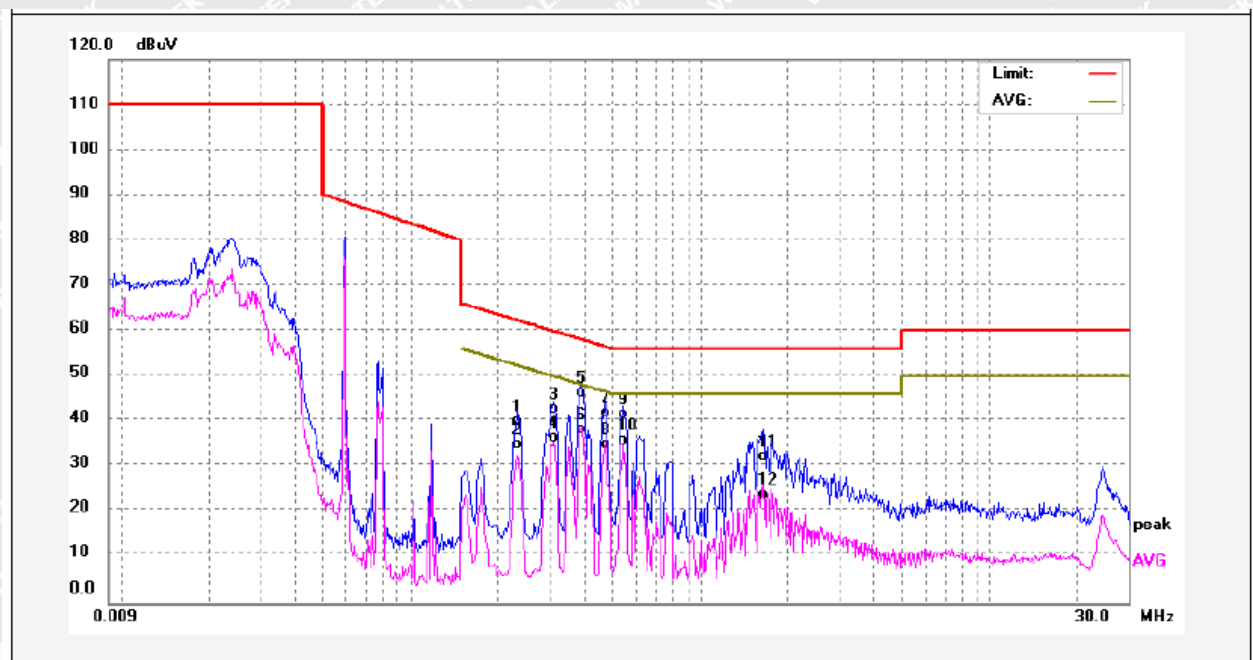

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.2341	30.52	9.63	40.15	62.30	-22.15	QP	
2	0.2341	25.27	9.63	34.90	52.30	-17.40	AVG	
3	0.3110	33.16	9.63	42.79	59.94	-17.15	QP	
4	0.3110	26.70	9.63	36.33	49.94	-13.61	AVG	
5	0.3899	36.72	9.63	46.35	58.06	-11.71	QP	
6	0.3899	28.64	9.63	38.27	48.06	-9.79	AVG	
7	0.4709	32.26	9.64	41.90	56.50	-14.60	QP	
8	0.4709	25.28	9.64	34.92	46.50	-11.58	AVG	
9	0.5448	31.92	9.64	41.56	56.00	-14.44	QP	
10	0.5448	26.12	9.64	35.76	46.00	-10.24	AVG	
11	1.6570	22.42	9.69	32.11	56.00	-23.89	QP	
12	1.6570	14.10	9.69	23.79	46.00	-22.21	AVG	



5.2 Radiated Electromagnetic Disturbance, 9kHz to 30MHz

Test Requirement.....	: EN IEC 55015
Test Method.....	: Clause 9.3.3 of EN IEC 55015
Test Result.....	: Pass
Frequency Range.....	: 9kHz to 30MHz
Class/Severity.....	: Table 9 of EN IEC 55015

5.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 21.7°C
Humidity.....	: 53%RH

EUT Operation:

Input Voltage	: 230V~, 50Hz
Operating Mode.....	: On mode

5.2.2 Block Diagram of Test Setup

The Radiated Electromagnetic Disturbance (9kHz to 30MHz) test was performed in accordance with the EN IEC 55015.

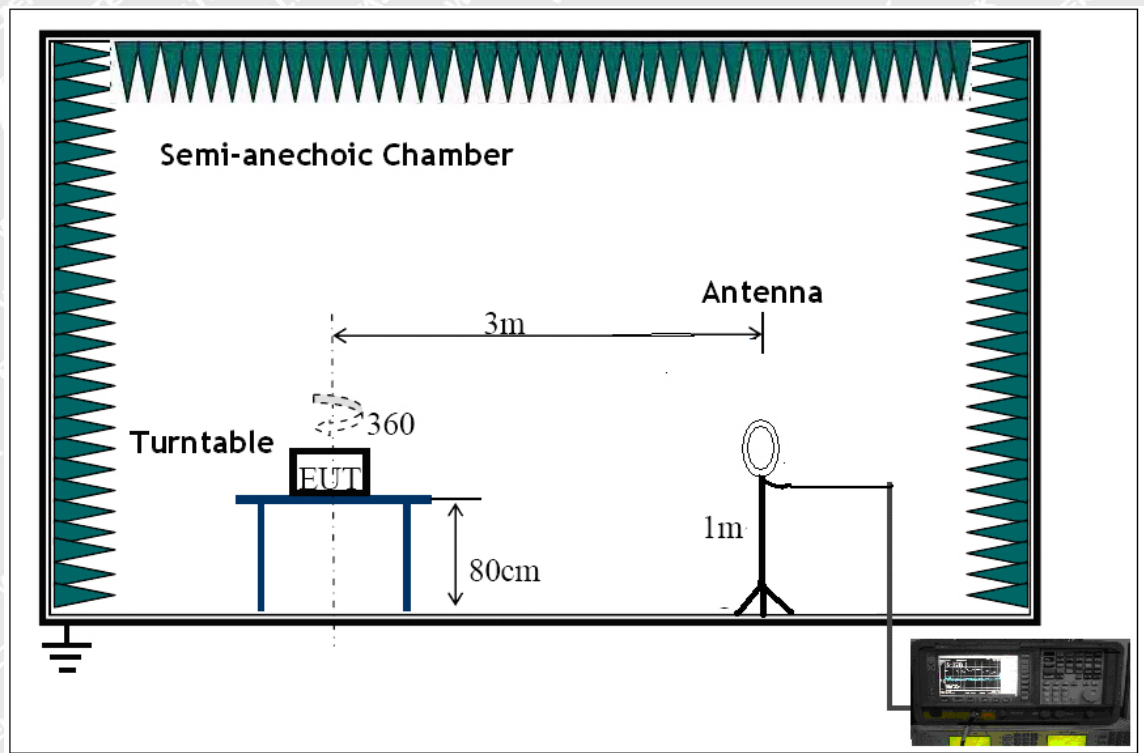


5.2.3 Measurement Data

According to the data in section 5.2.4, the EUT complied with the EN IEC 55015 standards.



5.2.4 Radiated Electromagnetic Disturbance test data, 9kHz to 30MHz


Vertical

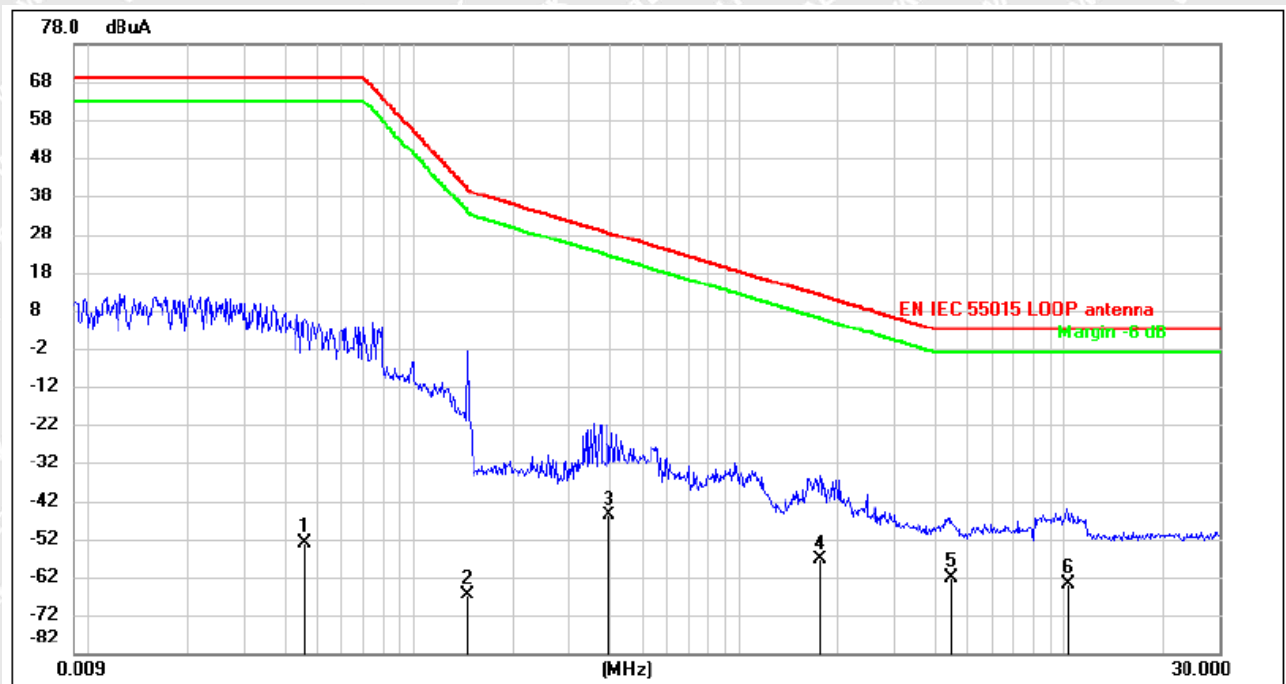

No.	Frequency (MHz)	Reading (dBuA)	Correct dB	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	0.0463	-22.81	-30.12	-52.93	69.00	-121.93	QP
2	0.1454	-34.60	-32.16	-66.76	40.23	-106.99	QP
3	0.3944	-14.13	-31.73	-45.86	28.40	-74.26	QP
4	1.7686	-25.75	-31.56	-57.31	11.95	-69.26	QP
5	4.4591	-30.64	-31.64	-62.28	3.00	-65.28	QP
6	10.1995	-31.79	-32.17	-63.96	3.00	-66.96	QP



Horizontal

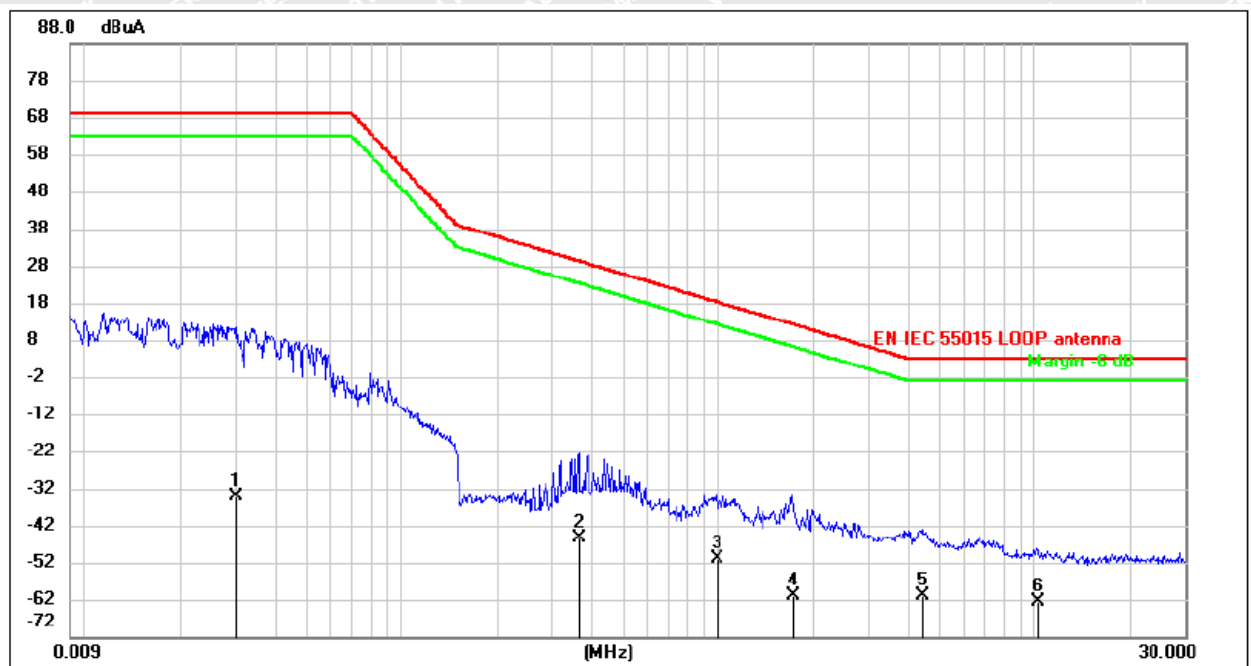

No.	Frequency (MHz)	Reading (dBuA)	Correct dB	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	0.0301	-5.04	-29.24	-34.28	69.00	-103.28	QP
2	0.3636	-13.75	-31.72	-45.47	29.29	-74.76	QP
3	0.9863	-19.38	-31.67	-51.05	18.35	-69.40	QP
4	1.7122	-29.59	-31.57	-61.16	12.30	-73.46	QP
5	4.4231	-29.27	-31.61	-60.88	3.00	-63.88	QP
6	10.1995	-30.57	-32.17	-62.74	3.00	-65.74	QP



5.3 Radiated Emission, 30MHz to 1GHz

Test Requirement..... : EN IEC 55015
Test Method..... : CISPR 16-2-3
Test Result..... : Pass
Frequency Range..... : 30MHz to 1GHz
Class/Severity..... : Table 10 of EN IEC 55015

5.3.1 E.U.T. Operation

Operating Environment:


Temperature..... : 21.6°C
Humidity..... : 58%RH

EUT Operation :

Input Voltage..... : 230V~, 50Hz
Operating Mode..... : On mode

5.3.2 Block Diagram of Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

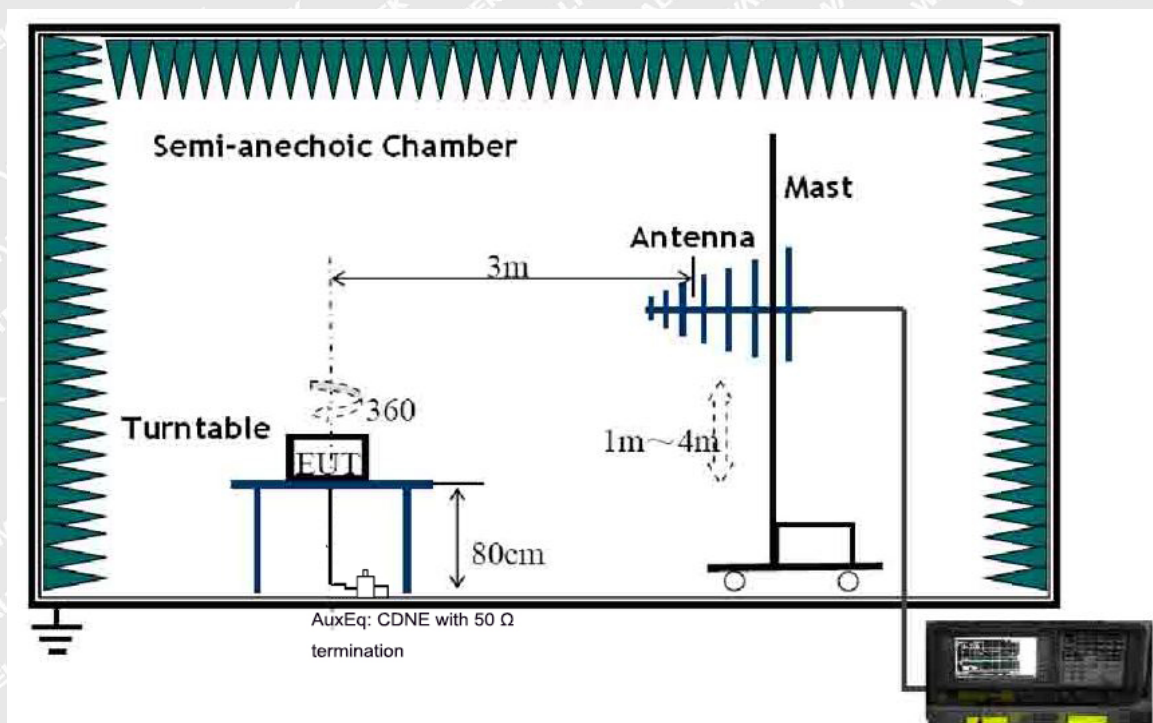



5.3.3 Measurement Data


The maximised peak emissions from the EUT was scanned and measured for Horizontal & Vertical polarisation. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line. According to the data in section 5.3.4, the EUT complied with the EN IEC 55015 standards.

WALTEK




5.3.4 Radiated Emission test data, 30MHz to 1GHz

Vertical

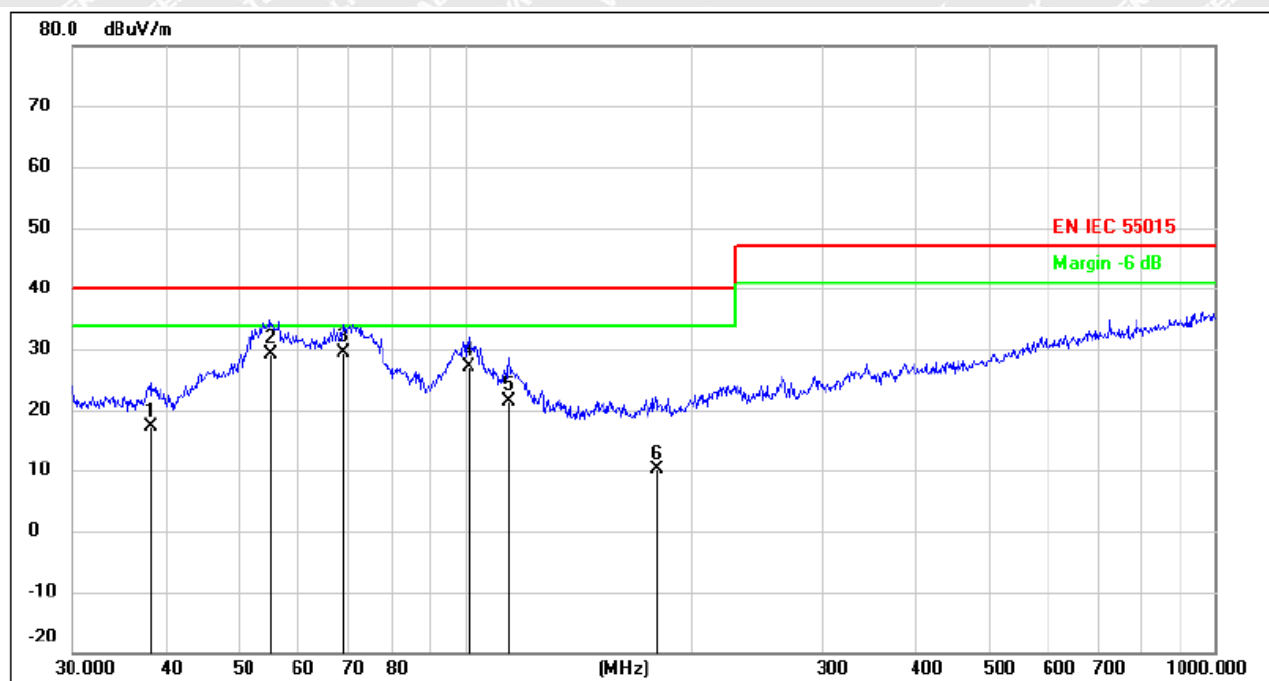

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.0782	6.36	10.83	17.19	40.00	-22.81	QP
2	55.0274	16.35	12.89	29.24	40.00	-10.76	QP
3	69.1140	19.60	9.72	29.32	40.00	-10.68	QP
4	101.2884	15.56	11.63	27.19	40.00	-12.81	QP
5	114.5146	10.61	10.72	21.33	40.00	-18.67	QP
6	180.0165	0.81	9.27	10.08	40.00	-29.92	QP

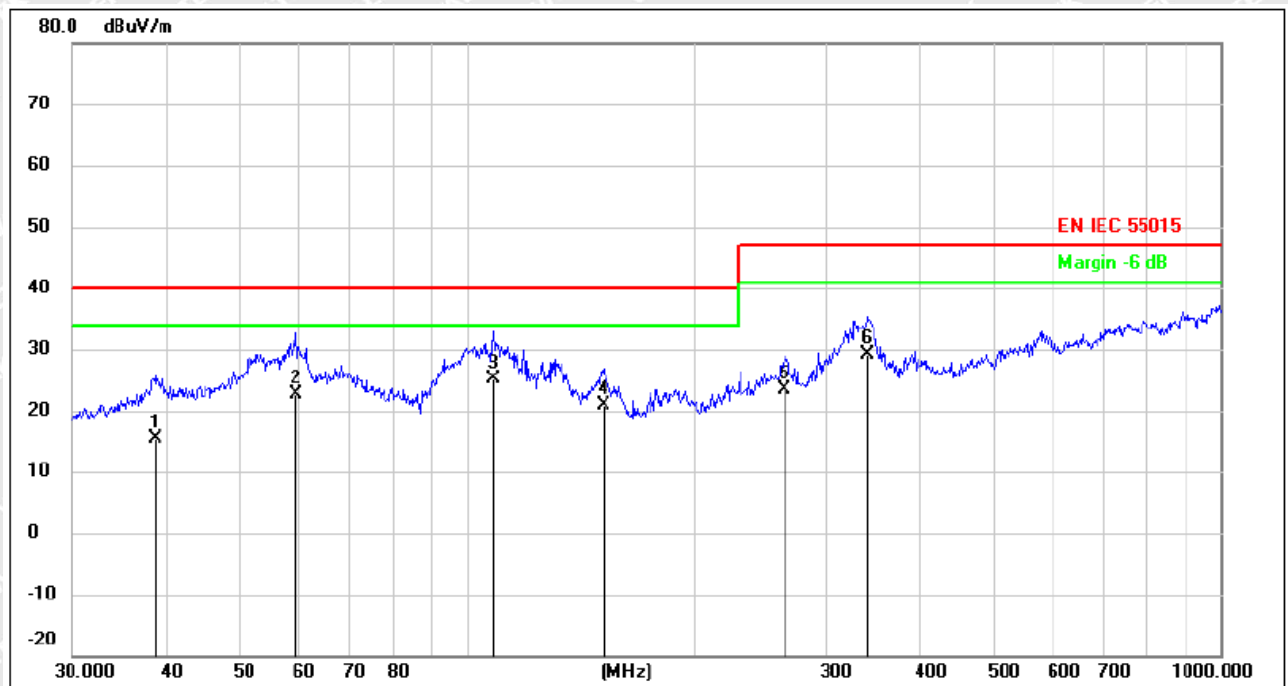**Horizontal**

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.6161	2.51	12.87	15.38	40.00	-24.62	QP
2	59.4405	9.70	13.00	22.70	40.00	-17.30	QP
3	108.6470	12.79	12.40	25.19	40.00	-14.81	QP
4	152.1297	12.18	8.62	20.80	40.00	-19.20	QP
5	263.8190	10.30	12.99	23.29	47.00	-23.71	QP
6	340.7817	12.90	16.21	29.11	47.00	-17.89	QP



5.4 Harmonics Current Emission

Test Requirement..... : EN IEC 61000-3-2

Test Method..... : EN IEC 61000-3-2

Test Result..... : Pass

Class/Severity..... : Class C

5.4.1 E.U.T. Operation

Operating Environment:

Temperature : 23.1°C

Humidity..... : 56.9%RH


EUT Operation:

Input Voltage : 230V~, 50Hz

Operating Mode..... : On mode

5.4.2 Block Diagram of Setup

The Harmonics Current emission test was performed in accordance with the EN IEC 61000-3-2.

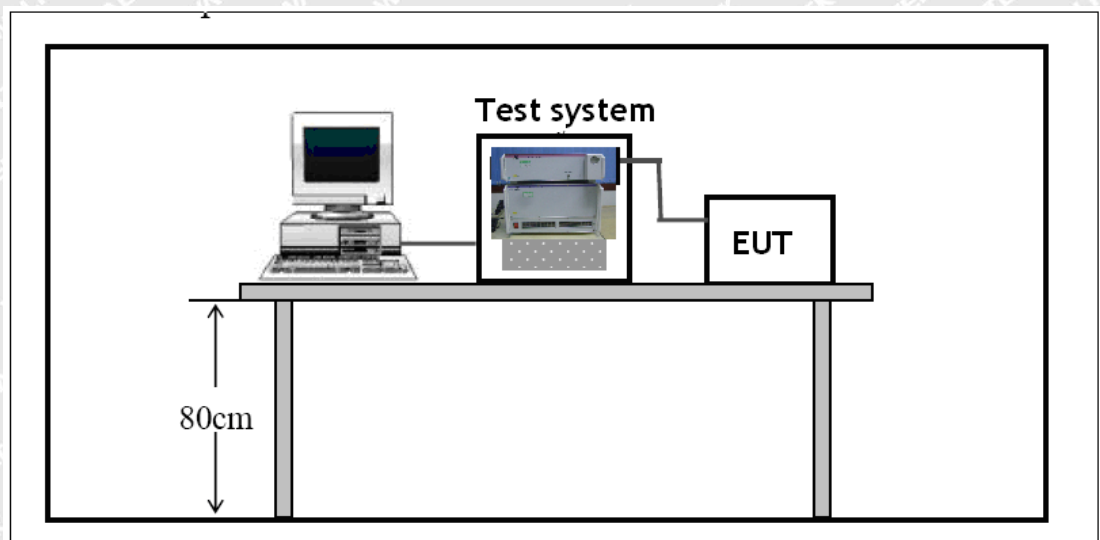



5.4.3 Harmonic Current Emission Test Data

Final Test Result	Pass	Tobs	Quasi-Stationary
Voltage	229.94 V	THC	0.1876 A
Current	4.8000 A	POHC/Limit	0.0231 A / 0.4550 A *3
Power	1087.64 W	Nominal	230 V / 50 Hz
Power Factor	0.9854	Fundamental Current	4.7962 A
Apparent Power	1103.8 VA	Measuring Period	150 s
THD (max)	3.91 %	Margin	100 %

Order	Limit1(A rms)	Limit2(A rms)	Ave(A rms)	Max(A rms)	Judge
1	----	----	4.7877	4.7962	N/A
2	0.0959	0.1439	0.0014	0.0015	N/A
3	1.4178	2.1267	0.1795	0.1801	Pass
4	----	----	0.0007	0.0007	N/A
5	0.4796	0.7194	0.0359	0.0360	Pass
6	----	----	0.0005	0.0005	N/A
7	0.3357	0.5036	0.0211	0.0212	N/A
8	----	----	0.0005	0.0005	N/A
9	0.2398	0.3597	0.0138	0.0139	N/A
10	----	----	0.0003	0.0004	N/A
11	0.1439	0.2158	0.0099	0.0100	N/A
12	----	----	0.0003	0.0004	N/A
13	0.1439	0.2158	0.0077	0.0078	N/A
14	----	----	0.0003	0.0003	N/A
15	0.1439	0.2158	0.0068	0.0069	N/A
16	----	----	0.0003	0.0003	N/A
17	0.1439	0.2158	0.0065	0.0065	N/A
18	----	----	0.0003	0.0003	N/A
19	0.1439	0.2158	0.0065	0.0066	N/A
20	----	----	0.0003	0.0003	N/A
21	0.2158	0.2158	0.0068	0.0069	N/A
22	----	----	0.0003	0.0004	N/A
23	0.2158	0.2158	0.0071	0.0072	N/A
24	----	----	0.0003	0.0004	N/A
25	0.2158	0.2158	0.0073	0.0074	N/A
26	----	----	0.0003	0.0004	N/A
27	0.2158	0.2158	0.0074	0.0074	N/A
28	----	----	0.0003	0.0004	N/A
29	0.2158	0.2158	0.0075	0.0076	N/A
30	----	----	0.0003	0.0004	N/A
31	0.2158	0.2158	0.0074	0.0075	N/A
32	----	----	0.0004	0.0005	N/A
33	0.2158	0.2158	0.0073	0.0074	N/A
34	----	----	0.0004	0.0005	N/A
35	0.2158	0.2158	0.0074	0.0075	N/A
36	----	----	0.0004	0.0005	N/A
37	0.2158	0.2158	0.0073	0.0074	N/A
38	----	----	0.0004	0.0005	N/A
39	0.2158	0.2158	0.0073	0.0074	N/A
40	----	----	0.0005	0.0005	N/A

N/A : Not Apply



5.5 Voltage Changes, Voltage Fluctuation and Flicker

Test Requirement : EN 61000-3-3

Test Method : EN 61000-3-3

Test Result..... : Pass

5.5.1 E.U.T. Operation

Operating Environment:

Temperature : 23.1°C

Humidity..... : 56.9%RH


EUT Operation:

Input Voltage : 230V~, 50Hz

Operating Mode..... : On mode

5.5.2 Block Diagram of Setup

The Harmonics test was performed in accordance with the EN 61000-3-3.

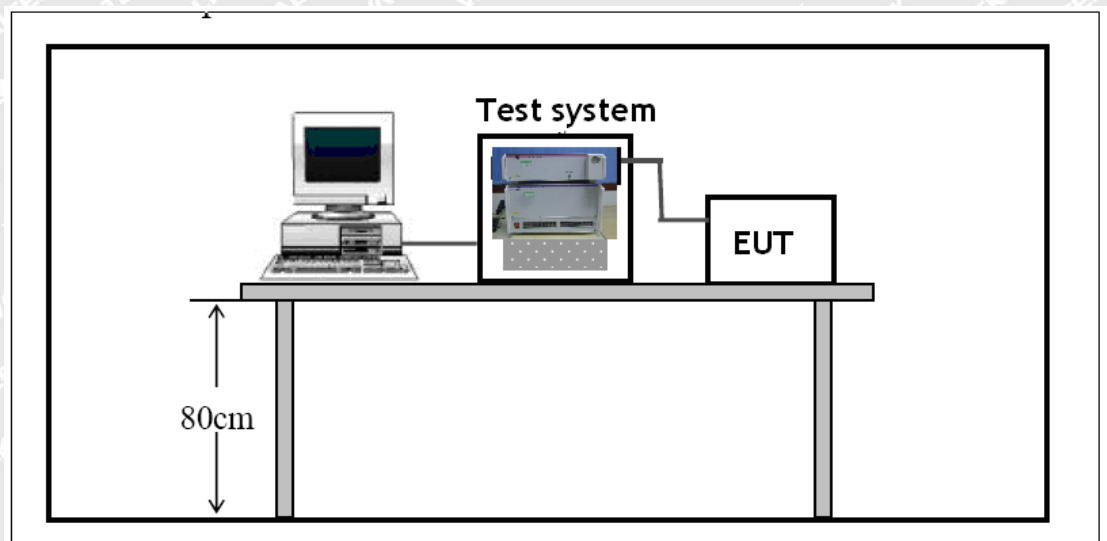

5.5.3 Voltage Changes, Voltage Fluctuation and Flicker Test Data

	d_c (%)	d_{max} (%)	T_{max} (ms)	P_{st}	P_{lt}
Limits	3.3	4	500ms	N/A	N/A
Result	0	0.035	0	N/A	N/A



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.

6.2 Electrostatic Discharge (ESD)

Test Requirement.....	:	EN 61547
Test Method.....	:	IEC 61000-4-2
Test Result.....	:	Pass
Discharge Impedance.....	:	330Ω / 150pF
Discharge Voltage.....	:	Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
Polarity.....	:	Positive & Negative
Number of Discharge.....	:	Minimum 10 times at each test point
Discharge Mode.....	:	Single Discharge
Discharge Period.....	:	1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:

Temperature	:	23.7°C
Humidity	:	57.1%RH
Barometric Pressure	:	100.4kPa


EUT Operation:

Input Voltage.....	:	230V~, 50Hz
Operating Mode.....	:	On mode



6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

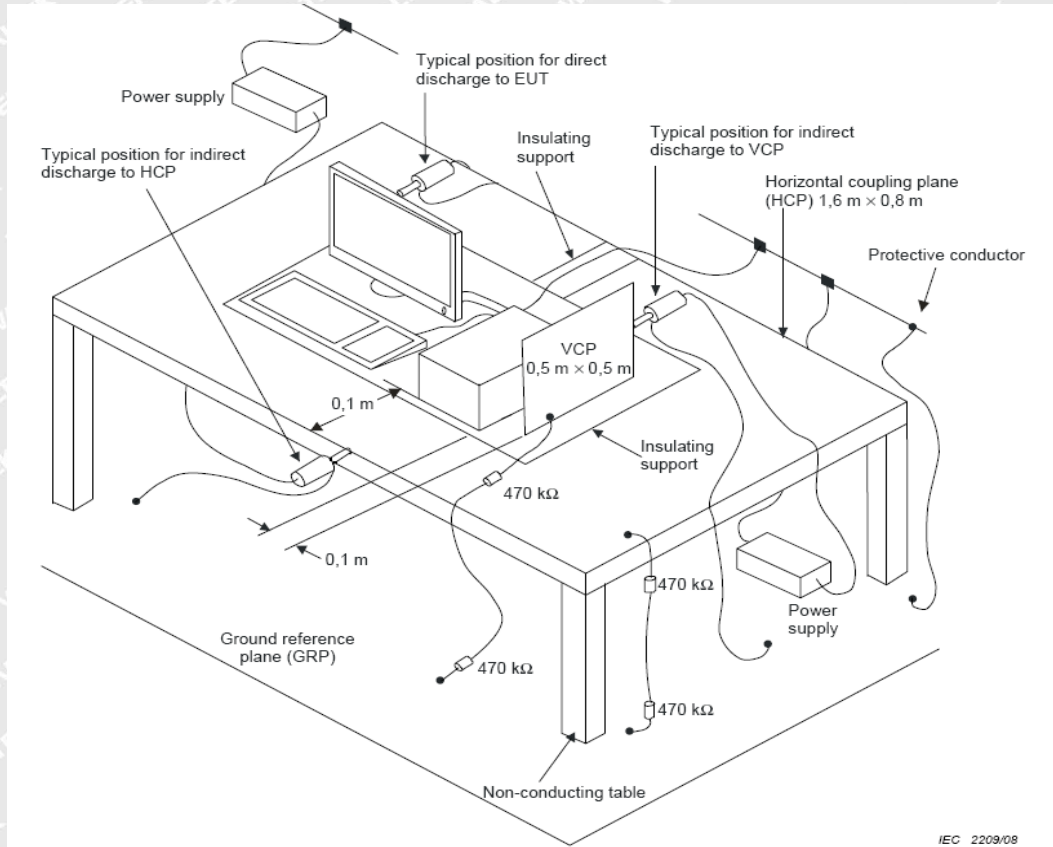

6.2.3 Direct Discharge Test Results

Observations:

Test points:

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results		
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge	Actual performance
±2, ±4, ±8	B	1	N/A	Pass*	A
±4	B	2	Pass*	N/A	A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.2.4 Indirect Discharge Test Results

Observations:

Test points: 1. All sides.

Indirect Discharge			Test Results		
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling	Actual performance
±4	B	1	Pass*	Pass*	A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

6.3 Radio-frequency electromagnetic fields, 80MHz to 1GHz

Test Requirement..... : EN 61547
 Test Method..... : IEC 61000-4-3
 Test Result..... : Pass
 Frequency Range..... : 80MHz to 1GHz
 Test level..... : 3V/m
 Modulation..... : 80%, 1kHz Amplitude Modulation.
 Face of EUT..... : Front, Back, Left, Right
 Antenna polarisation : Horizontal& Vertical

6.3.1 E.U.T. Operation

Operating Environment:

Temperature..... : 20.9°C
 Humidity..... : 49.8%RH


EUT Operation:

Input Voltage..... : 230V~, 50Hz
 Operating Mode..... : On mode



6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

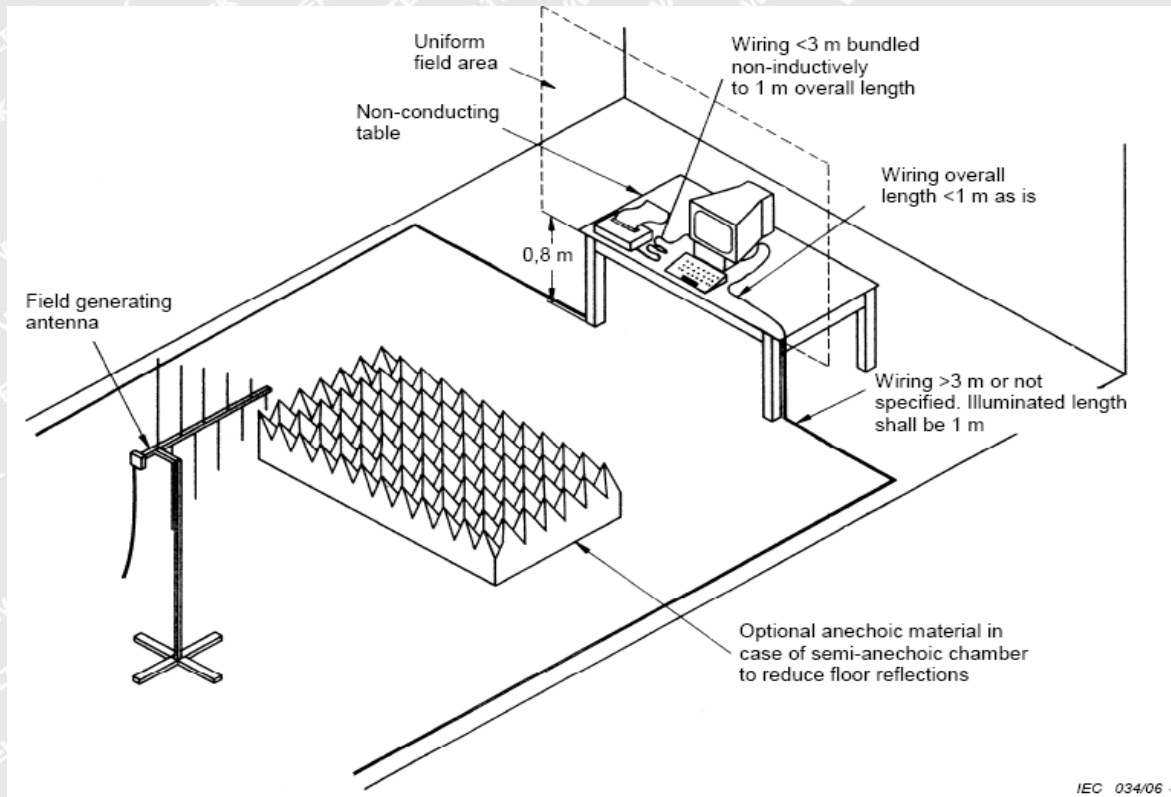

6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result	Actual performance
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	3s	A	Pass*	A
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	3s	A	Pass*	A

Remark:

* During the test no deviation was detected to the selected operation mode(s)



6.4 Electrical Fast Transients (EFT)

Test Requirement.....	: EN 61547
Test Method.....	: IEC 61000-4-4
Test Result.....	: Pass
Test Level.....	: 1.0kV on AC Mains
Polarity.....	: Positive & Negative
Repetition Frequency	: 5kHz
Burst Duration.....	: 300ms
Test Duration.....	: 2 minutes per level & polarity

6.4.1 E.U.T. Operation

Operating Environment:

Temperature	: 23.7°C
Humidity.....	: 57.1%RH

EUT Operation:


Input Voltage	: 230V~, 50Hz
Operating Mode.....	: On mode

WALTEK



6.4.2 Block Diagram of Setup

The Electrical Fast Transients Immunity test was performed in accordance with the IEC 61000-4-4.

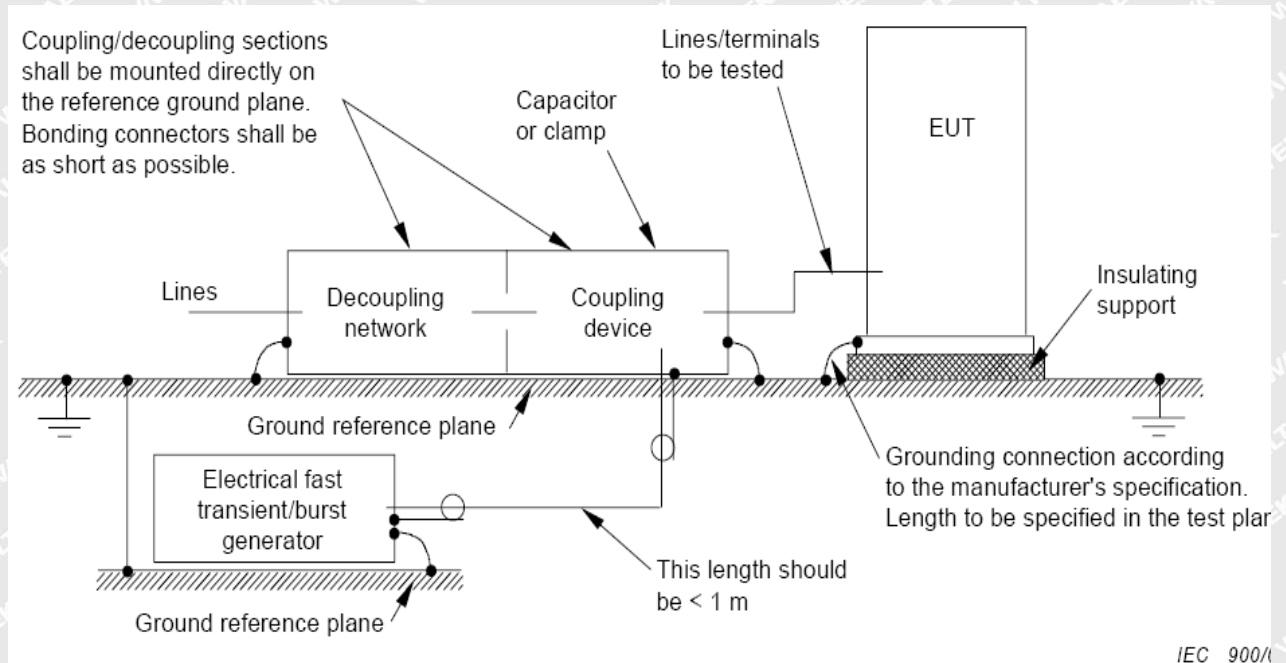

6.4.3 Test Results

Test Port	Test Level(kV)	Performance Criterion	Result	Actual performance
Line-Neutral-PE	± 1.0	B	Pass*	A

Remark:

* During the test no deviation was detected to the selected operation mode(s)



6.5 Surge

Test Requirement.....	: EN 61547
Test Method.....	: IEC 61000-4-5
Test Result.....	: Pass
Test level.....	: Table 10 of EN 61547
Interval	: 60s between each surge
No. of surges	: 5 positive at 90°, 5 negative at 270°.

6.5.1 E.U.T. Operation

Operating Environment:


Temperature	: 23.7°C
Humidity.....	: 57.1%RH

EUT Operation:

Input Voltage	: 230V~, 50Hz
Operating Mode.....	: On mode

6.5.2 Block Diagram of Setup

The Surge Immunity test was performed in accordance with the IEC 61000-4-5.

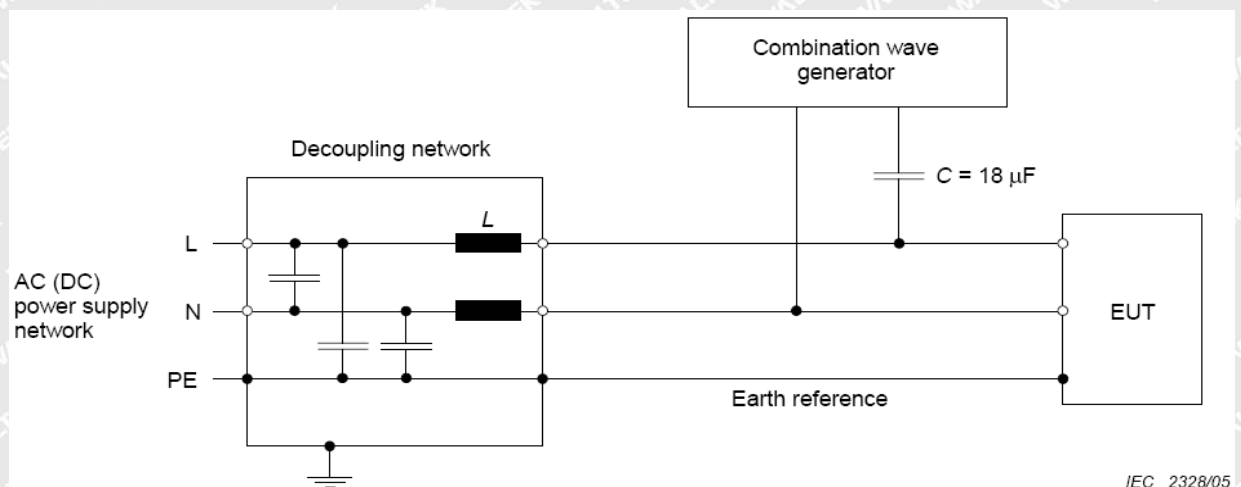

6.5.3 Test Results

Test Port	Applied Voltage (kV)	Performance criterion	Result	Actual performance
Between Live And Neutral	$\pm 0.5/1$	C	Pass*	B
Between Live And Ground	$\pm 0.5/1/2$	C	Pass*	B
Between Neutral And Ground	$\pm 0.5/1/2$	C	Pass*	B

Remark:

* During the test no deviation was detected to the selected operation mode(s)



6.6 Injected Currents Immunity 0.15MHz to 80MHz

Test Requirement.....	: EN 61547
Test Method	: IEC 61000-4-6
Test Result	: Pass
Frequency Range	: 0.15MHz to 80MHz
Test level	: 3V r.m.s. (unmodulated emf into 150 Ω)
Modulation	: 80%, 1kHz Amplitude Modulation.

6.6.1 E.U.T. Operation

Operating Environment:


Temperature	: 24.2°C
Humidity	: 54.5%RH

EUT Operation:

Input Voltage	: 230V~, 50Hz
Operating Mode	: On mode

6.6.2 Block Diagram of Setup

The Injected Currents Immunity test was performed in accordance with the IEC 61000-4-6.

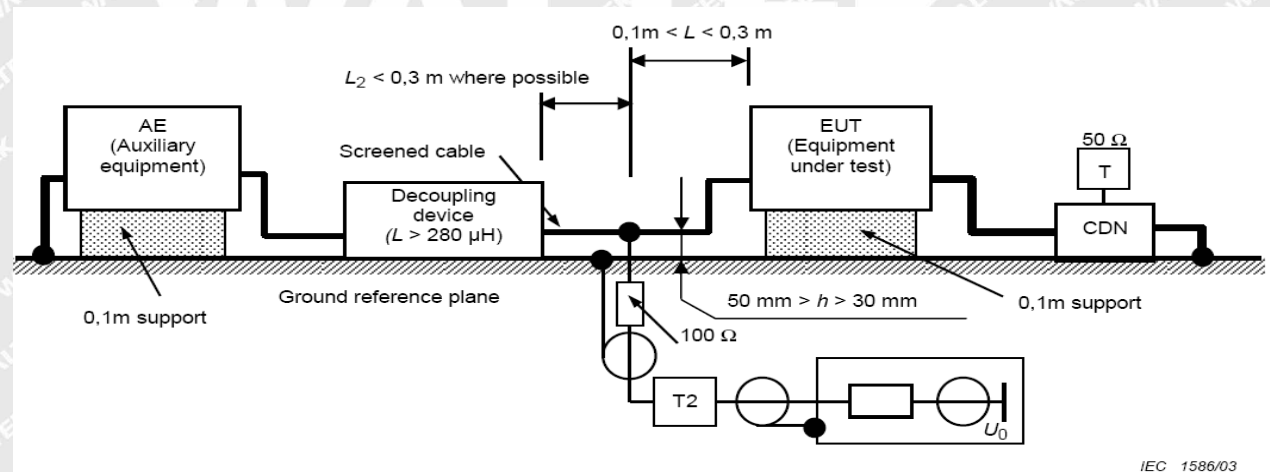

6.6.3 Test Results

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Performance Criterion	Result	Actual performance
0.15MHz to 80MHz	3 Wire AC Supply Cables	3Vr.m.s.	80%, 1kHz Amp. Mod.	1%	3s	A	Pass*	A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

Waltek Testing Group (Ningbo) Co., Ltd.

<http://www.waltek.com.cn>



6.7 Voltage Dips and Interruptions

Test Requirement.....	EN 61547
Test Method.....	IEC 61000-4-11
Test Result.....	Pass
Test Level(Voltage reduction)	0%&70 % of U_T (Supply Voltage)
No. of Dips / Interruptions.....	1 per Level at 20ms intervals

6.7.1 E.U.T. Operation

Operating Environment:


Temperature	23.7°C
Humidity.....	57.1%RH

EUT Operation:

Input Voltage	230V~, 50Hz
Operating Mode.....	On mode

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the IEC 61000-4-11.

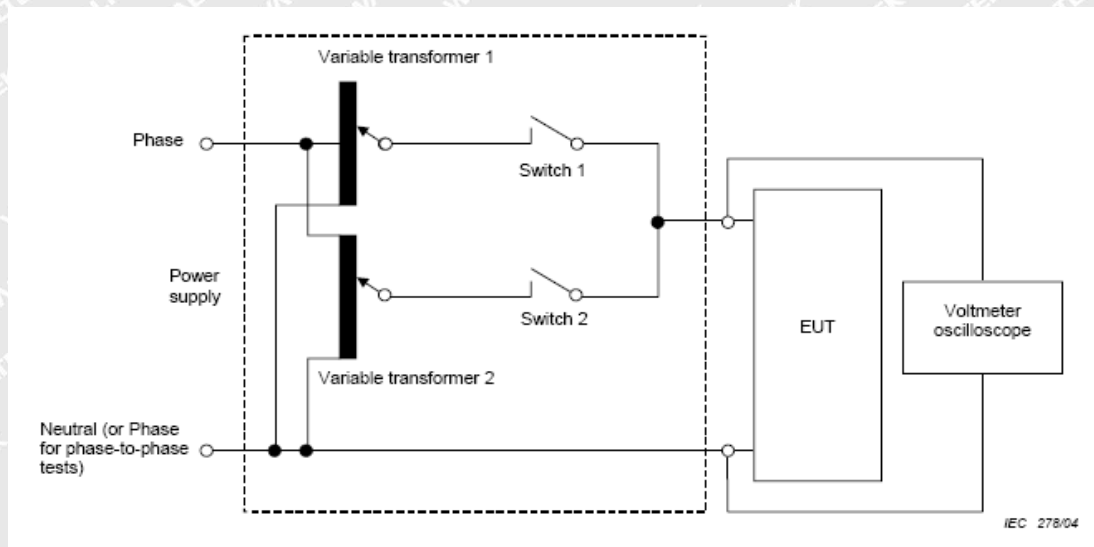

6.7.3 Test Results

Test Level in % U_T	Phase	Performance criterion	Duration	Result	Actual performance
0	0° & 180°	B	0.5	Pass*	A
70	0° & 180°	C	10	Pass*	A


Remark:

* During the test no deviation was detected to the selected operation mode(s)




7 Photographs – Test Setup

7.1 Photograph – Mains Terminal Disturbance Voltage Test Setup

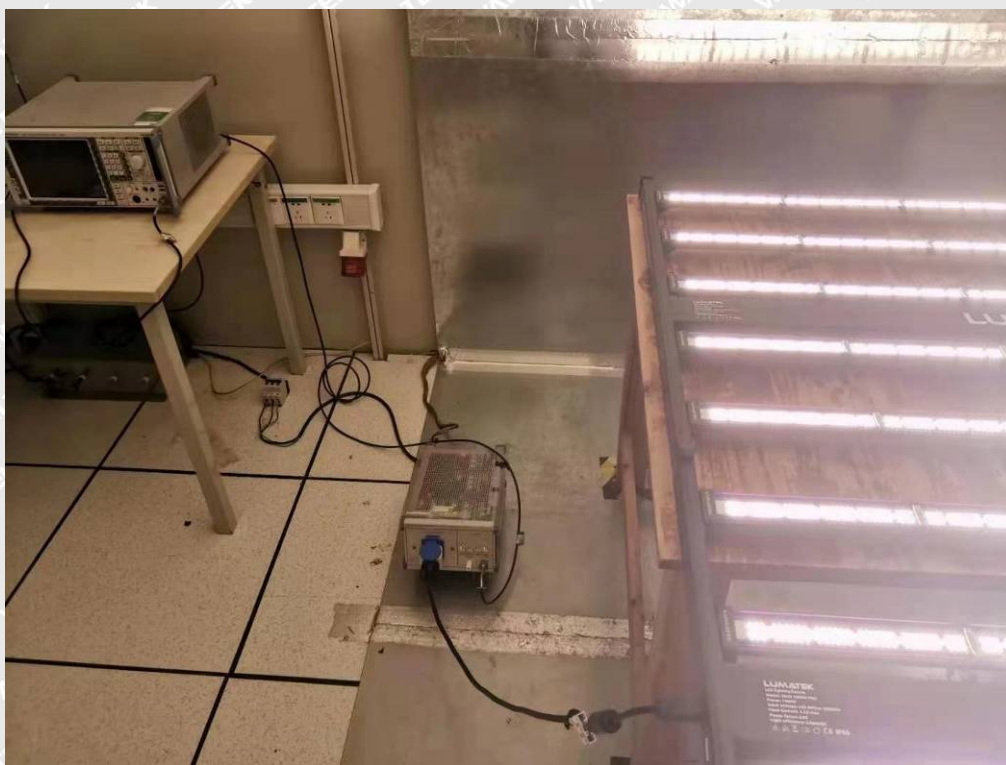


7.2 Photograph – Radiated electromagnetic disturbance Test Setup, 9kHz to 30MHz

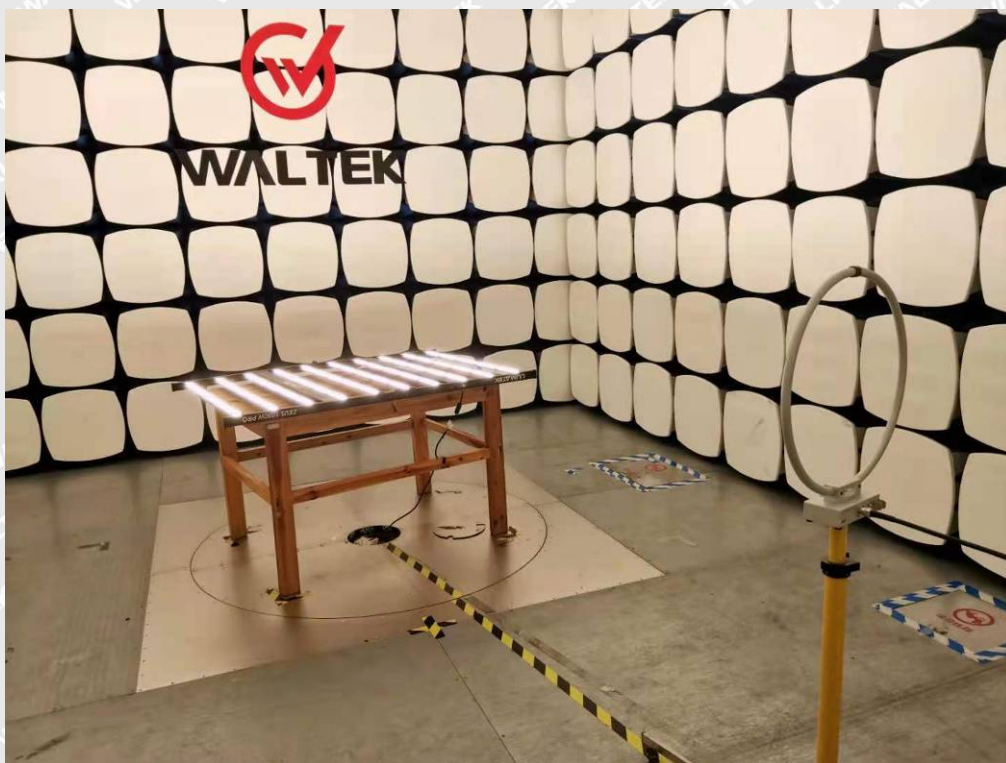




7.3 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz

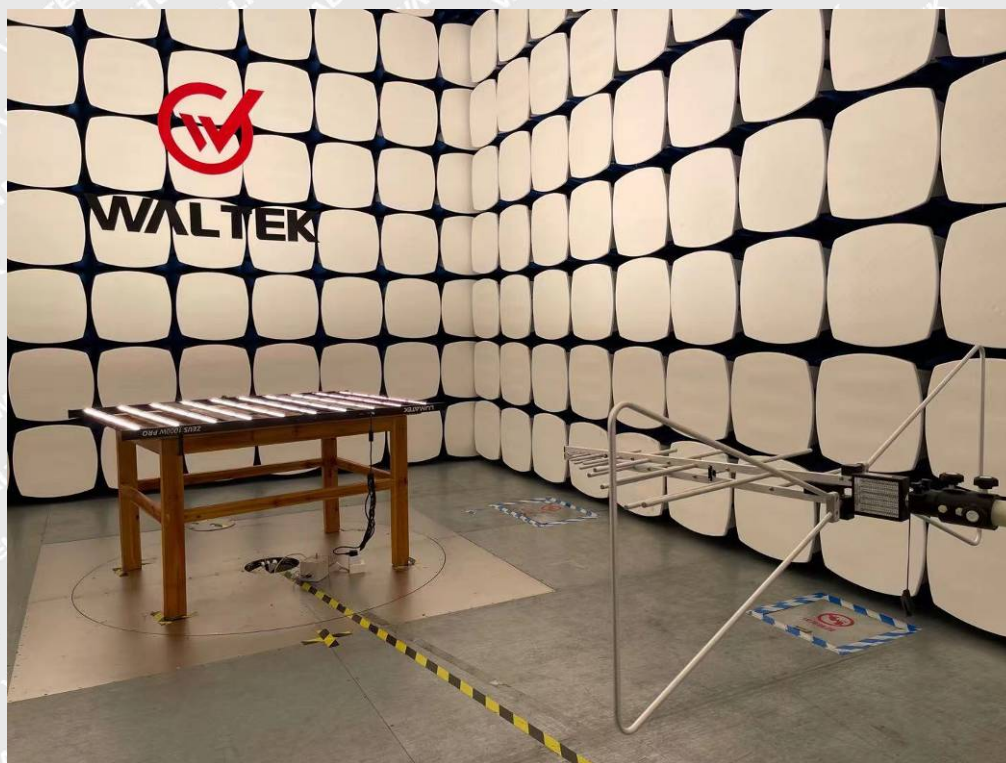

7.4 Photograph – Harmonic Current and Flicker Test Setup

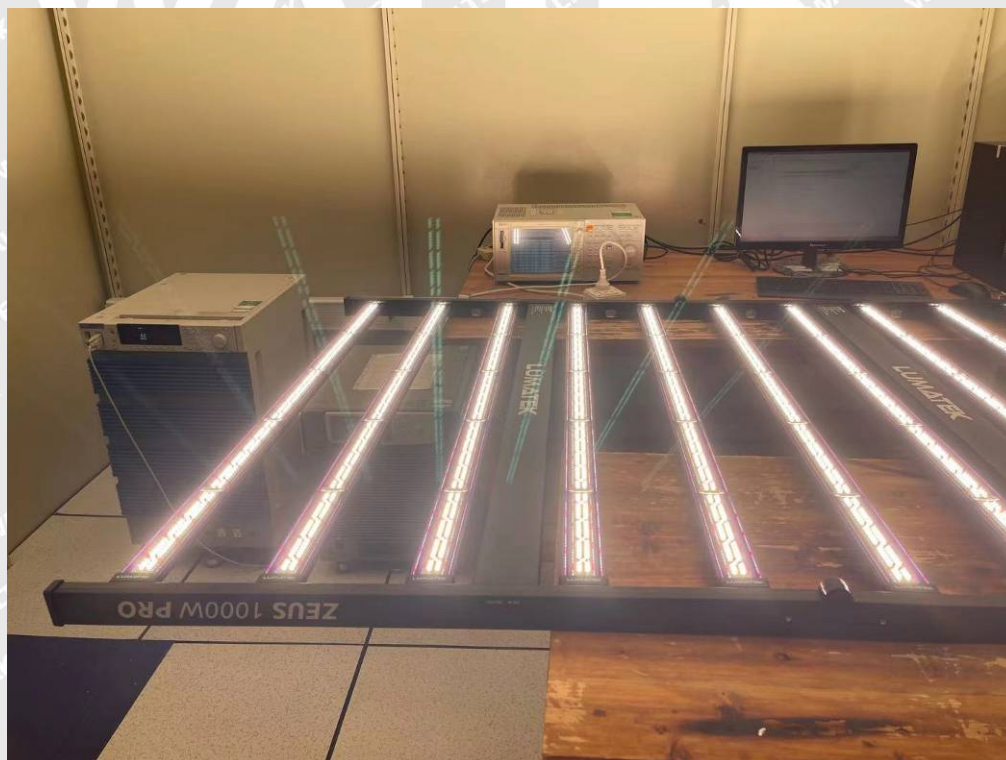



7.5 Photograph – ESD Immunity Test Setup



7.6 Photograph – Radio-frequency electromagnetic fields Immunity Test Setup





7.7 Photograph – EFT & Voltage Dips and Interruptions Immunity Test Setup



7.8 Photograph – Surge Immunity Test Setup





7.9 Photograph – Injected Currents Immunity Test Setup



WALTEK




8 Photographs – Constructional Details

8.1 EUT – Front View



8.2 EUT – Back View

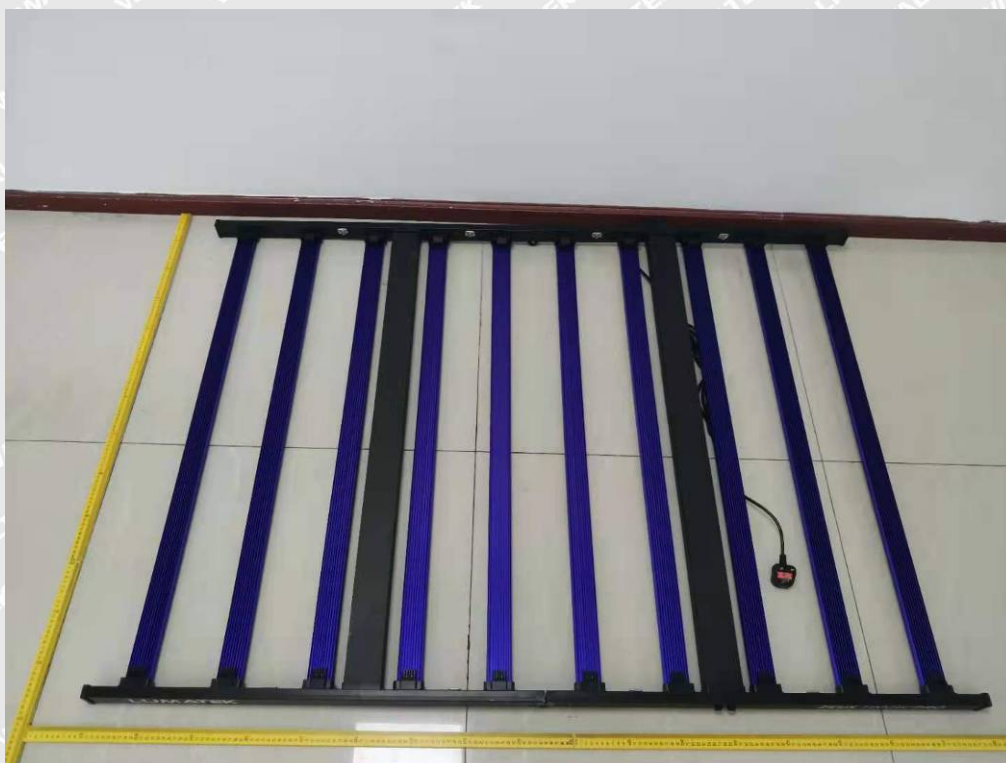

=====End of Report=====